

# Gala

The Gala provides a stylish interior design element. It conforms to the spirit of a particular school of art, design and architecture where art and technology combine to form a whole. Robust steel sections draw a distinct outline, while the volume of the heat-transfer fluid allows for operation in low-temperature heating systems.

A modern stainless-steel radiator that is impossible to overlook.

Material	steel
Connection threads	4 × G1/2"
Testing overpressure	0,65 Mpa
Max. operating overpressure	0,5 Mpa
Max. operating temperature	110 °C



1.




1. Gala - Khaki S27 [21] / 2. Gala - Pastel yellow RAL 1034 RAL k7 Classic

## Custom-Made Radiator


Modification options	Gala
Surface treatment	colour
Height range [mm]	NO
Length range [mm]	NO
Combined/electric version	YES
Standard connection (SK)	STANDARD
Middle connection (SM)	STANDARD
Side connection (SB)	NO
One-sided into space fixing	NO

## Accessories

 Colour ref. chart page 104

 Bath. accessories page 82

## Connection Options

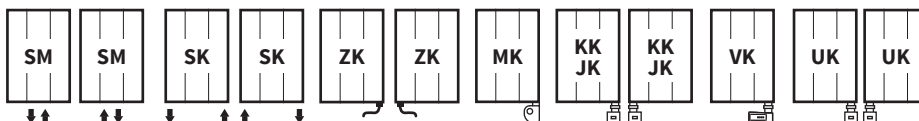


The type of connection must be specified in the order; for more information see page 96, positions 13 and 14.



Height (H) Length (L) [mm]	Depth (B)	Weight	Water capacity	Temperature exponent	Output 75/65/20°C	Power input Z heat. rod, Mini PW, Whistle, Stone	Power input KTX 3	Connection span (Z)	White RAL 9016	Electric
code	[mm]	[kg]	[l]	[-]	[W]	[W]	[W]	[mm]		
DGAL 1155 0500	30	15,7	8,8	1,279	507	500	600	50/430	✓	✓
DGAL 1755 0500	30	23,5	13,4	1,275	768	800	800	50/430	✓	✓
DGAL 1155 0600	30	18,0	10,4	1,279	596	600	600	50/530	✓	✓
DGAL 1755 0600	30	27,3	15,5	1,275	902	900	1000	50/530	✓	✓


Ordering procedure page 96 / The weight of radiators is listed without water and package

## Mounting




Type	X [mm]	A [mm]
Metal brackets	55-65	70-80

## Type height (H) / length (L) [mm]



H: 1155  
L: 500, 600

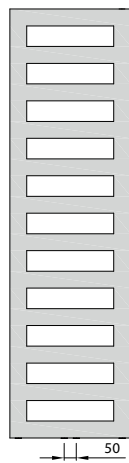

H: 1755  
L: 500, 600



Gala - Khaki S27 [21]