


# ANTIKA DOUBLE HORIZONTAL



## ANTIKA DOUBLE HORIZONTAL


Material	steel pipes $\varnothing$ 28 mm / steel profiles 50 × 10 mm
Connection thread	2 × G1/2"
Testing overpressure	0,65 MPa
Max. operating overpressure	0,5 MPa
Max. operating temperature	110 °C
Number of profiles	56, 78, 100

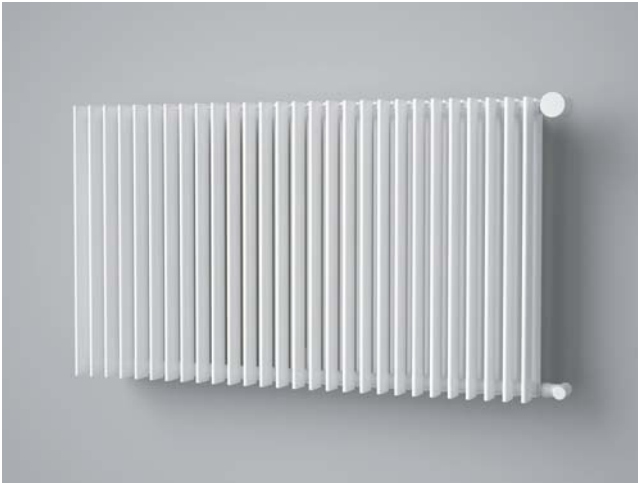



ANTIKA DOUBLE HORIZONTAL 576 × 1000

Type H/L [mm]	Depth B [mm]	Weight [kg]	Water capacity [l]	Temperature exponent [n]	Heating Output [W]			Recommended power input		Connection span [mm]
					75/65/20 °C	70/55/20 °C	55/45/20 °C	paint [W]	chrome [W]	
<b>576/1000</b>	128	43,0	11,5	1,262	<b>1523</b>	1241	799	-	-	540
<b>576/1400</b>	128	60,0	16,1	1,262	<b>2111</b>	1720	1108	-	-	540
<b>576/1800</b>	128	77,0	20,6	1,262	<b>2700</b>	2199	1417	-	-	540

Thermal power measuring follows in accordance with EN 442.  
Accessories (page 48, 49 and 50) is not part of the radiator.



Connection options

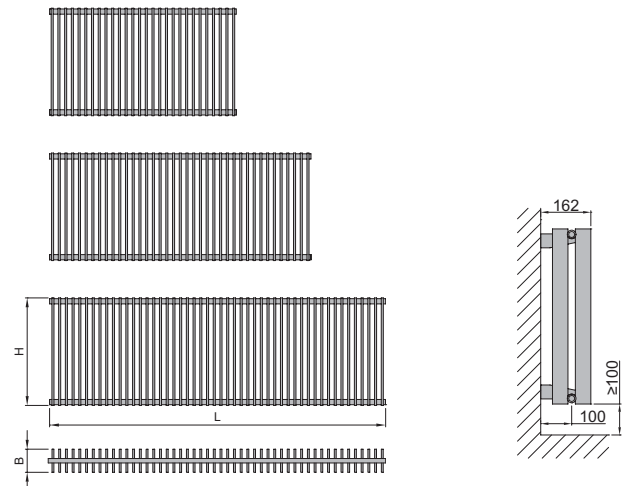

DAND 0576 1000... DAND 0576 1400... DAND 0576 1800...